

# AMSOIL®

Catalog





## Product Index

|  |    |
|--|----|
| Motor Oil  | 4  |
| European Motor Oil   | 9  |
| Classic/Collector Car Motor Oil  | 10 |
| Racing Oil   | 11 |
| Diesel Oil   | 12 |
| Briggs & Stratton Synthetic<br>4T Racing Oil/Oil Analysis                  | 15 |
| ATV/UTV Oil/Snowmobile Oil   | 16 |
| Dirt Bike Oil  | 18 |
| Suspension Fluid   | 19 |
| Motorcycle Oil   | 20 |
| Marine Oil   | 22 |
| 2-Stroke Oil   | 24 |
| Chaincase & Gear Oil   | 25 |
| Small-Engine Oil   | 26 |
| Transmission Fluid   | 27 |
| Gear Lube  | 31 |
| Filters  | 34 |
| Grease   | 36 |
| Air Tool Oil/Bar and Chain Oil/<br>Car-Care Products                       | 38 |
| Compressor Oil/Fuel Additives  | 39 |
| Coolant  | 44 |
| Coolant Boost/Metal Protector  | 45 |
| Engine and Transmission<br>Flush/Firearm Lubricant/Power<br>Steering Fluid | 46 |
| Aftermarket Partners   | 47 |

\*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



All AMSOIL lubricants and filters are covered by the AMSOIL Limited Warranty. For details visit [AMSOIL.com/warranty.aspx](https://www.amsoil.com/warranty.aspx).




# WHY BUY SIGNATURE SERIES?

## Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile test<sup>F</sup>. AMSOIL provided far superior wear protection and kept bearings looking like new.

<sup>F</sup>Testing conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.

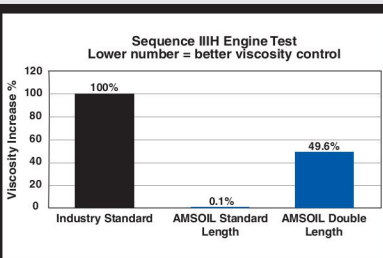

## AMSOIL Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL delivered **twice the viscosity control** required by the standard.<sup>GG</sup>

<sup>GG</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

## AMSOIL Helps Keep Engines Cleaner

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more acid-neutralizing power than Mobil 1\*** and helping engines stay cleaner, longer.<sup>LL</sup>

<sup>LL</sup>Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020.



## AMSOIL Keeps Pistons Cleaner

Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.<sup>FF</sup>

<sup>FF</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

## Signature Series Protects Against LSPI

AMSOIL Synthetic Motor Oils achieved **100% protection** against LSPI.<sup>B</sup>

<sup>B</sup>Based on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

## Signature Series Guards Turbos

Protects turbochargers **72% better** than required<sup>C</sup> by the GM dexos1<sup>®</sup> Gen 2 specification.

<sup>C</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

## Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents<sup>D</sup> to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge.<sup>DD</sup>

<sup>DD</sup>vs. AMSOIL OE Motor Oil<sup>DD</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN specification.

**Signature Series Fights Wear**  
**75% more engine protection**  
 against horsepower loss and wear.<sup>A</sup>

<sup>A</sup>Based on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.

**SIGNATURE SERIES SYNTHETIC MOTOR OIL**

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 40,200 kilometers or 1 year, whichever comes first.



● **0W-16**

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AZSQTC | EA    | (1) 946-ml Bottle   |
| AZSQTC | CA    | (12) 946-ml Bottles |

● **0W-20**

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ASMQTC | EA    | (1) 946-ml Bottle      |
| ASMQTC | CA    | (12) 946-ml Bottles    |
| ASM1GC | EA    | (1) 3.78-litre Bottle  |
| ASM1GC | CA    | (4) 3.78-litre Bottles |

● **5W-20**

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ALMQTC | EA    | (1) 946-ml Bottle      |
| ALMQTC | CA    | (12) 946-ml Bottles    |
| ALM1GC | EA    | (1) 3.78-litre Bottle  |
| ALM1GC | CA    | (4) 3.78-litre Bottles |

● **0W-30**

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AZQTC  | EA    | (1) 946-ml Bottle   |
| AZQTC  | CA    | (12) 946-ml Bottles |

● **5W-30**

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ASLQTC | EA    | (1) 946-ml Bottle      |
| ASLQTC | CA    | (12) 946-ml Bottles    |
| ASL1GC | EA    | (1) 3.78-litre Bottle  |
| ASL1GC | CA    | (4) 3.78-litre Bottles |

● **10W-30**

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ATMQTC | EA    | (1) 946-ml Bottle   |
| ATMQTC | CA    | (12) 946-ml Bottles |

● **0W-40**

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AZFQTC | EA    | (1) 946-ml Bottle   |
| AZFQTC | CA    | (12) 946-ml Bottles |

○ **5W-50**

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AMRQTC | EA    | (1) 946-ml Bottle   |
| AMRQTC | CA    | (12) 946-ml Bottles |

XLZ

XLM

XLF

XLT



## Extended-Life 100% Synthetic Motor Oil

Overbuilt for road warriors so you can confidently drive up to 32,000 km or 1 year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience. Provides **37% more cleaning power** to help keep your engine running smoother, longer.<sup>100</sup>

### ● 0W-20

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| XLZQTC | EA    | (1) 946-ml Bottle      |
| XLZQTC | CA    | (12) 946-ml Bottles    |
| XLZ1GC | EA    | (1) 3.78-litre Bottle  |
| XLZ1GC | CA    | (4) 3.78-litre Bottles |

### ● 5W-20

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| XLMQTC | EA    | (1) 946-ml Bottle      |
| XLMQTC | CA    | (12) 946-ml Bottles    |
| XLM1GC | EA    | (1) 3.78-litre Bottle  |
| XLM1GC | CA    | (4) 3.78-litre Bottles |

### ● 5W-30

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| XLFQTC | EA    | (1) 946-ml Bottle      |
| XLFQTC | CA    | (12) 946-ml Bottles    |
| XLF1GC | EA    | (1) 3.78-litre Bottle  |
| XLF1GC | CA    | (4) 3.78-litre Bottles |

### ● 10W-30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| XLTQTC | EA    | (1) 946-ml Bottle   |
| XLTQTC | CA    | (12) 946-ml Bottles |

"Put this in my light duty, full size pickup. Noticeable difference right away. Engine quieter and clean."

– Jim P  
Northern VA

<sup>100</sup>Compared to AMSOIL OE Synthetic Motor Oil.





OES

OEZ

OEM

OEF

OET



## OE 100% Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. **Provides 47 percent more wear protection.**<sup>6</sup> Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

### ● 0W-16

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| OESQTC | EA    | (1) 946-ml Bottle   |
| OESQTC | CA    | (12) 946-ml Bottles |

### ● 0W-20

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| OEZQTC | EA    | (1) 946-ml Bottle      |
| OEZQTC | CA    | (12) 946-ml Bottles    |
| OEZ1GC | EA    | (1) 3.78-litre Bottle  |
| OEZ1GC | CA    | (4) 3.78-litre Bottles |

### ● 5W-20

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| OEMQTC | EA    | (1) 946-ml Bottle      |
| OEMQTC | CA    | (12) 946-ml Bottles    |
| OEM1GC | EA    | (1) 3.78-litre Bottle  |
| OEM1GC | CA    | (4) 3.78-litre Bottles |

### ● 5W-30

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| OEFQTC | EA    | (1) 946-ml Bottle      |
| OEFQTC | CA    | (12) 946-ml Bottles    |
| OEF1GC | EA    | (1) 3.78-litre Bottle  |
| OEF1GC | CA    | (4) 3.78-litre Bottles |

### ● 10W-30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| OETQTC | EA    | (1) 946-ml Bottle   |
| OETQTC | CA    | (12) 946-ml Bottles |

### ● 0W-40

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| OEG1GC | EA    | (1) 3.78-litre Bottle  |
| OEG1GC | CA    | (4) 3.78-litre Bottles |

### Tough-to-reach fill hole?

Order a FloTool Flexible Pour Spout with your oil to make the job easier. Fits easy-packs, 946-ml and 3.78-litre bottles.

| STOCK# | P.C. PRICE | FULL PRICE |
|--------|------------|------------|
| G3721  | 5.65       | 5.90       |



<sup>6</sup>Based on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.



HE016



HE020

## 100% Synthetic Hybrid Motor Oil

Custom formulation designed to combat the unique challenges posed by hybrid electric vehicles (HEV) and plug-in hybrid electric vehicles (PHEV), like frequent starts and stops and fuel dilution. It flows quickly to reach critical components when the engine engages. AMSOIL Hybrid Motor Oil features a robust viscosity that protects against the harmful effects of fuel dilution. Protects for up to 24,000 km or 1 year, whichever comes first.

### ● 0W-16

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| HE016QTC | EA    | (1) 946-ml Bottle   |
| HE016QTC | CA    | (12) 946-ml Bottles |

### ● 0W-20

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| HE020QTC | EA    | (1) 946-ml Bottle   |
| HE020QTC | CA    | (12) 946-ml Bottles |



HM020



HM520



HM530



HM1030

## 100% Synthetic High-Mileage Motor Oil

Designed specifically for the unique demands of high-mileage engines, helping extend the life of vehicles. It features a unique formulation that delivers extra detergency and a robust viscosity to clean and protect high-mileage engines with 120,000+ km. It delivers purpose-built protection at a time in a vehicle's life where it could benefit from more-robust maintenance. AMSOIL High-Mileage Motor Oil cleans and protects engines with boosted detergency and an additive package that fights oil breakdown and oil leaks. Protects for up to 19,000 km or 1 year, whichever comes first.

### ● 0W-20

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| HM020QTC | EA    | (1) 946-ml Bottle   |
| HM020QTC | CA    | (12) 946-ml Bottles |

### ● 5W-20

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| HM520QTC | EA    | (1) 946-ml Bottle   |
| HM520QTC | CA    | (12) 946-ml Bottles |

### ● 5W-30

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| HM530QTC | EA    | (1) 946-ml Bottle   |
| HM530QTC | CA    | (12) 946-ml Bottles |

### ● 10W-30

| STOCK#    | UNITS | PKG./SIZE           |
|-----------|-------|---------------------|
| HM1030QTC | EA    | (1) 946-ml Bottle   |
| HM1030QTC | CA    | (12) 946-ml Bottles |



**AMSOIL Synthetic European Motor Oil** features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.

● **0W-20 LS-VW Synthetic European Motor Oil**

API SN-PLUS, SN... • ACEA C5 • VW 508.00/509.00

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| EZTQTC | EA    | (1) 946-ml Bottle   |
| EZTQTC | CA    | (12) 946-ml Bottles |

● **0W-20 LS Synthetic European Motor Oil**

API SN-PLUS (Resource Conserving), SN, SM... • ILSAC GF-5 • ACEA C5, A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AFEQTC | EA    | (1) 946-ml Bottle   |
| AFEQTC | CA    | (12) 946-ml Bottles |

● **0W-30 MS Synthetic European Motor Oil**

Use in vehicles that require API SP, SN Plus, SN • ACEA C2/C3 • BMW LL-01FE • MB 229.31, 229.51, 229.52 • VW/Audi 504/507 • Porsche C30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| EOTQTC | EA    | (1) 946-ml Bottle   |
| EOTQTC | CA    | (12) 946-ml Bottles |

● **5W-30 LS Synthetic European Motor Oil**

Use in vehicles that require API SN • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30 • VW 504.00/507.00

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AELQTC | EA    | (1) 946-ml Bottle   |
| AELQTC | CA    | (12) 946-ml Bottles |

● **0W-40 FS Synthetic European Motor Oil**

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| EFOQTC | EA    | (1) 946-ml Bottle   |
| EFOQTC | CA    | (12) 946-ml Bottles |

● **5W-40 MS Synthetic European Motor Oil**

Use in vehicles that require ACEA C3 • API SN/SM/CF... • BMW Longlife-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault RNO700/RNO710 • VW/Audi 502.00/505.01 • MB-Approval 229.51 • Porsche A40

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AFLQTC | EA    | (1) 946-ml Bottle      |
| AFLQTC | CA    | (12) 946-ml Bottles    |
| AFL1GC | EA    | (1) 3.78-litre Bottle  |
| AFL1GC | CA    | (4) 3.78-litre Bottles |

● **5W-40 FS Synthetic European Motor Oil**

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700 • MB-Approval 229.5 • Porsche A40 • VW/Audi 502.00/505.00

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| EFMQTC | EA    | (1) 946-ml Bottle      |
| EFMQTC | CA    | (12) 946-ml Bottles    |
| EFM1GC | EA    | (1) 3.78-litre Bottle  |
| EFM1GC | CA    | (4) 3.78-litre Bottles |



# BUILD IT.

# CRUISE IT.



## ● Assembly Lube

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

| STOCK#   | UNITS | PKG./SIZE    |
|----------|-------|--------------|
| EALTB EA | (1)   | 118-ml Tube  |
| EALTB CA | (12)  | 118-ml Tubes |

## ● Break-In Oil

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

| STOCK#    | UNITS | PKG./SIZE      |
|-----------|-------|----------------|
| BRKQTC EA | (1)   | 946-ml Bottle  |
| BRKQTC CA | (12)  | 946-ml Bottles |

## Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

### ● 10W-30

| STOCK#    | UNITS | PKG./SIZE      |
|-----------|-------|----------------|
| ZRTQTC EA | (1)   | 946-ml Bottle  |
| ZRTQTC CA | (12)  | 946-ml Bottles |

### ● 10W-40

| STOCK#    | UNITS | PKG./SIZE      |
|-----------|-------|----------------|
| ZRDQTC EA | (1)   | 946-ml Bottle  |
| ZRDQTC CA | (12)  | 946-ml Bottles |

### ● 20W-50

| STOCK#    | UNITS | PKG./SIZE      |
|-----------|-------|----------------|
| ZRFQTC EA | (1)   | 946-ml Bottle  |
| ZRFQTC CA | (12)  | 946-ml Bottles |



## AMSOIL Delivers Superior Rust Protection



In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.<sup>11</sup>

<sup>11</sup>Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.

# RACE IT.

## PRODUCTS THE PROS USE



"AMSOIL products are the best on the market and definitely give us an added performance factor."

**Bryce Menzies**  
Professional Off-Road Driver



## DOMINATOR® Synthetic Racing Oil

Superior performance and maximum protection in high-performance and racing applications.

### ● 5W-20

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| RD20QT | EA    | (1) 946-ml Bottle   |
| RD20QT | CA    | (12) 946-ml Bottles |

### ● 10W-30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| RD30QT | EA    | (1) 946-ml Bottle   |
| RD30QT | CA    | (12) 946-ml Bottles |

### ● 15W-50

| STOCK#  | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| RD50QTC | EA    | (1) 946-ml Bottle   |
| RD50QTC | CA    | (12) 946-ml Bottles |

### ● SAE 60

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| RD60QT | EA    | (1) 946-ml Bottle   |
| RD60QT | CA    | (12) 946-ml Bottles |



## AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In third-party testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new.**<sup>DD</sup>



<sup>DD</sup>Based on third party testing of AMSOIL 5W-30 Signature Series Max Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel® DD13 Scuffing test for specification DFS 93K222. All trademarks names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

## Signature Series Max-Duty Synthetic Diesel Oil

Use in vehicles that require API CK-4, CJ-4 or CI-4+

Engineered for maximum protection and performance for diesel engines. **Provides 6X more engine protection.**<sup>1</sup> Delivers up to 60% better turbo cleanliness<sup>1</sup> and withstands the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower. Provides up to 76% less oil consumption than that required by the API CK-4 standard in the Caterpillar-1N oil consumption test. Provides up to 2X better rust protection.<sup>K</sup>

### 5W-30

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| DHDQTC | EA    | (1) 946-ml Bottle      |
| DHDQTC | CA    | (12) 946-ml Bottles    |
| DHD1G  | EA    | (1) 3.78-litre Bottle  |
| DHD1G  | CA    | (4) 3.78-litre Bottles |

### 10W-30

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| DTTQTC | EA    | (1) 946-ml Bottle      |
| DTTQTC | CA    | (12) 946-ml Bottles    |
| DTT1GC | EA    | (1) 3.78-litre Bottle  |
| DTT1GC | CA    | (4) 3.78-litre Bottles |

### 0W-40

Delivers 4X better cold-temperature performance<sup>EE</sup>

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| DZFQT  | EA    | (1) 946-ml Bottle      |
| DZFQT  | CA    | (12) 946-ml Bottles    |
| DZF1GC | EA    | (1) 3.78-litre Bottle  |
| DZF1GC | CA    | (4) 3.78-litre Bottles |



DZF



### 5W-40

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| DEOQTC | EA    | (1) 946-ml Bottle      |
| DEOQTC | CA    | (12) 946-ml Bottles    |
| DEO1GC | EA    | (1) 3.78-litre Bottle  |
| DEO1GC | CA    | (4) 3.78-litre Bottles |
| DEOTPC | EA    | (1) 9.45-litre Bottle  |
| DEOTPC | CA    | (2) 9.45-litre Bottles |

### 15W-40

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| DMEQTC | EA    | (1) 946-ml Bottle      |
| DMEQTC | CA    | (12) 946-ml Bottles    |
| DME1GC | EA    | (1) 3.78-litre Bottle  |
| DME1GC | CA    | (4) 3.78-litre Bottles |
| DMETPC | EA    | (1) 9.45-litre Bottle  |
| DMETPC | CA    | (2) 9.45-litre Bottles |

<sup>1</sup>Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing. <sup>EE</sup>Based on industry standard testing using the NMMA FC-W Rust Test. <sup>K</sup>than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation.

<sup>DD</sup>When compared to SAE 15W-40 in ASTM D5293 Cold Cranking Viscosity Test.





# banks

## DIESEL

MOTORSPORTS  
www.DIESELMOTORSPORTS.US



ADN



ADO



ADP



### Heavy-Duty Synthetic Diesel Oil

Use in vehicles that require API CK-4, CJ-4 or CI-4+

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. **Provides 4X more engine protection.<sup>1</sup>** Provides up to 66% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test.

#### 10W-30

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ADNQT  | EA    | (1) 946-ml Bottle      |
| ADNQC  | CA    | (12) 946-ml Bottles    |
| ADNTPC | EA    | (1) 9.45-litre Bottle  |
| ADNTPC | CA    | (2) 9.45-litre Bottles |

#### 5W-40

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ADOQT  | EA    | (1) 946-ml Bottle      |
| ADOQC  | CA    | (12) 946-ml Bottles    |
| ADO1GC | EA    | (1) 3.78-litre Bottle  |
| ADO1GC | CA    | (4) 3.78-litre Bottles |
| ADOTPC | EA    | (1) 9.45-litre Bottle  |
| ADOTPC | CA    | (2) 9.45-litre Bottles |

#### 15W-40

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ADPQT  | EA    | (1) 946-ml Bottle      |
| ADPQC  | CA    | (12) 946-ml Bottles    |
| ADP1GC | EA    | (1) 3.78-litre Bottle  |
| ADP1GC | CA    | (4) 3.78-litre Bottles |
| ADPTPC | EA    | (1) 9.45-litre Bottle  |
| ADPTPC | CA    | (2) 9.45-litre Bottles |

<sup>1</sup>than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation.



DP020



DP530

## 100% Synthetic Diesel Oil

Engineered specifically for smaller American diesel pickups, vans, cars and SUVs, providing outstanding protection, performance and fuel economy. Delivers up to 6X better wear protection than required by a leading industry standard.<sup>1</sup>

### ● 0W-20

Use in vehicles that require GM dexosD

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| DP020QTC | EA    | (1) 946-ml Bottle   |
| DP020QTC | CA    | (12) 946-ml Bottles |

### ● 5W-30

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106

• Ford WSS-M2C214-B1 • ACEA C3

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| DP530QTC | EA    | (1) 946-ml Bottle   |
| DP530QTC | CA    | (12) 946-ml Bottles |



AME

## ● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil

Engineered for pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs)..

Use in vehicles that require API CI-4+

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AMEQTC | EA    | (1) 946-ml Bottle      |
| AMEQTC | CA    | (12) 946-ml Bottles    |
| AME1GC | EA    | (1) 3.78-litre Bottle  |
| AME1GC | CA    | (4) 3.78-litre Bottles |
| AMETPC | EA    | (1) 9.45-litre Bottle  |
| AMETPC | CA    | (2) 9.45-litre Bottles |

<sup>1</sup>Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.

### Like Heavy Duty Diesel and Marine Oil?

Try Signature Series Max-Duty 15W-40 for a serious upgrade. See page 12.



## Premium Protection Synthetic Motor Oil

Ideal for older gasoline engines and pre-2007 diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc formula is desired.

### ● 10W-40

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AMOQTC | EA    | (1) 946-ml Bottle   |
| AMOQTC | CA    | (12) 946-ml Bottles |

### ● 20W-50

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AROQTC | EA    | (1) 946-ml Bottle   |
| AROQTC | CA    | (12) 946-ml Bottles |

GBS2960



## Briggs & Stratton Synthetic 4T Racing Oil

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| GBS2960 | EA    | (1) 946-ml Bottle   |
| GBS2960 | CA    | (12) 946-ml Bottles |

## Oil Analysis

AMSOIL offers oil analysis service options from Oil Analyzers Inc. By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit [www.oaitesting.com](http://www.oaitesting.com).

| STOCK# | PKG./SIZE                      |
|--------|--------------------------------|
| KIT401 | 1 sample kit (UPS Paid)        |
| KIT402 | 1 sample kit                   |
| G1206  | Oil Suction Pump w/10-ft. hose |
| G1571  | Replacement Hose 25-ft.        |

**Oil Analyzers**  
INC.





AUV54



AUV40



## SYNTHETIC ATV/UTV MOTOR OIL

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.

### ● 5W-40

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| AUV54QTC | EA    | (1) 946-ml Bottle   |
| AUV54QTC | CA    | (12) 946-ml Bottles |

### ● 10W-40

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| AUV40QTC | EA    | (1) 946-ml Bottle   |
| AUV40QTC | CA    | (12) 946-ml Bottles |

### ● 5W-50

| STOCK#   | UNITS | PKG./SIZE           |
|----------|-------|---------------------|
| AUV50QTC | EA    | (1) 946-ml Bottle   |
| AUV50QTC | CA    | (12) 946-ml Bottles |

AUV50



AFF



## Formula 4-Stroke® Powersports Synthetic Motor Oil

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AFFQTC | EA    | (1) 946-ml Bottle   |
| AFFQTC | CA    | (12) 946-ml Bottles |



### ● Synthetic ATV/UTV Transmission & Differential Fluid

Protects heavily loaded, high-torque ATV and UTV gears and bearings against wear in the most severe operating conditions. Convenient easy-pack helps access tough-to-reach fill holes, making the job faster and cleaner.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AUDTQC | EA    | (1) 946-ml Bottle      |
| AUDTQC | CA    | (12) 946-ml Bottles    |
| AUDTPK | EA    | (1) 946-ml Easy-Pack   |
| AUDTPK | CA    | (12) 946-ml Easy-Packs |

### ● Synthetic ATV/UTV Powertrain Fluid

Purpose-built for transmission/differentials and front drives in Polaris® ATVs and UTVs, offering the perfect combination of protection and convenience.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AUPTPK | EA    | (1) 946-ml Easy-Pack   |
| AUPTPK | CA    | (12) 946-ml Easy-Packs |

### ATV/UTV Oil Change Kits

Contains everything needed to perform an oil change on most Polaris® and Can-Am® UTVs and ATVs. Call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate kit for your application.

| STOCK # | UNITS | PKG./SIZE |
|---------|-------|-----------|
| PK1C    | EA    | 1 kit     |
| PK2C    | EA    | 1 kit     |
| PK3C    | EA    | 1 kit     |
| PK4C    | EA    | 1 kit     |
| CK4C    | EA    | 1 kit     |
| CK5C    | EA    | 1 kit     |



AUDT



AUPT

CK5C




PK4C





## AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection<sup>7</sup>. How good is it? In extreme simulated-start testing, AMSOIL provided superior wear protection and kept clutch plates looking new.

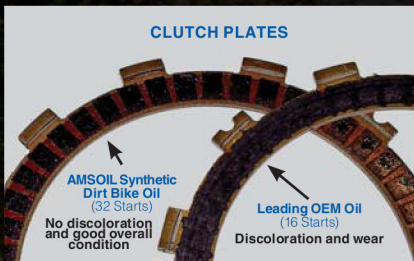

<sup>7</sup>Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.



## SYNTHETIC DIRT BIKE OIL

Delivers confidence in clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

### ● 10W-40

| STOCK#  | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| DB40QTC | EA    | (1) 946-ml Bottle   |
| DB40QTC | CA    | (12) 946-ml Bottles |

### ● 10W-50

| STOCK#  | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| DB50QTC | EA    | (1) 946-ml Bottle   |
| DB50QTC | CA    | (12) 946-ml Bottles |

### ● 10W-60

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| DB60QT | EA    | (1) 946-ml Bottle   |
| DB60QT | CA    | (12) 946-ml Bottles |







# SWAP MOTO

RACE SERIES



## ● Synthetic Dirt Bike Transmission Fluid

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| DBTFQT | EA    | (1) 946-ml Bottle   |
| DBTFQT | CA    | (12) 946-ml Bottles |

## SHOCK THERAPY® SUSPENSION FLUID

Controls friction, heat, wear, foaming and scuffing in suspension components.

### ● Lightweight #5

Use in applications that demand quick rebounds under extreme temperatures.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| STLQT  | EA    | (1) 946-ml Bottle   |
| STLQT  | CA    | (12) 946-ml Bottles |

### ● Medium #10

Use in applications that require more dampening and slower rebounds.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| STMQT  | EA    | (1) 946-ml Bottle   |
| STMQT  | CA    | (12) 946-ml Bottles |




## AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X better** than Harley-Davidson\* SYN3\* for **improved protection** against compensator and transmission gear wear.<sup>95</sup>

### Viscosity Breakdown

% viscosity loss in the CEC L45-KRL, ASTM D445, test

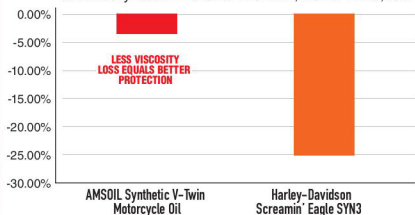

<sup>95</sup>Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



## SYNTHETIC V-TWIN MOTORCYCLE OIL

### ● 20W-40

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian\* and Victory\* motorcycles.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MVIQTC  | EA    | (1) 946-ml Bottle   |
| MVIQTC  | CA    | (12) 946-ml Bottles |

### ● 20W-50

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson,\* Buell\* and other motorcycle engines, primaries and transmissions.

| STOCK # | UNITS | PKG./SIZE              |
|---------|-------|------------------------|
| MCVQTC  | EA    | (1) 946-ml Bottle      |
| MCVQTC  | CA    | (12) 946-ml Bottles    |
| MCV1GC  | EA    | (1) 3.78-litre Bottle  |
| MCV1GC  | CA    | (4) 3.78-litre Bottles |

### ● SAE 60

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MCSQT   | EA    | (1) 946-ml Bottle   |
| MCSQT   | CA    | (12) 946-ml Bottles |

### ● 15W-60

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MSVQT   | EA    | (1) 946-ml Bottle   |
| MSVQT   | CA    | (12) 946-ml Bottles |





MVT



### ● Synthetic V-Twin Transmission Fluid

Helps quiet V-twin transmission noise and enable smooth shifts.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MVTQTC  | EA    | (1) 946-ml Bottle   |
| MVTQTC  | CA    | (12) 946-ml Bottles |

### ● Synthetic V-Twin Primary Fluid

Delivers consistent clutch feel and helps riders easily find neutral.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MVPQTC  | EA    | (1) 946-ml Bottle   |
| MVPQTC  | CA    | (12) 946-ml Bottles |

MVP



## SYNTHETIC METRIC MOTORCYCLE OIL

### ● 10W-30

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda,\* Yamaha,\* Suzuki\* and Kawasaki\* motorcycles.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MCTQT   | EA    | (1) 946-ml Bottle   |
| MCTQT   | CA    | (12) 946-ml Bottles |

### ● 10W-40

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am,\* Honda, Yamaha, Kawasaki, Triumph,\* Suzuki, BMW\* and other motorcycle engines.

| STOCK # | UNITS | PKG./SIZE              |
|---------|-------|------------------------|
| MCFQTC  | EA    | (1) 946-ml Bottle      |
| MCFQTC  | CA    | (12) 946-ml Bottles    |
| MCF1GC  | EA    | (1) 3.78-litre Bottle  |
| MCF1GC  | CA    | (4) 3.78-litre Bottles |

### ● 15W-50

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati,\* BMW, KTM,\* Yamaha, Triumph and Royal Enfield\* motorcycles.

| STOCK # | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| MFFQT   | EA    | (1) 946-ml Bottle   |
| MFFQT   | CA    | (12) 946-ml Bottles |

MCF



MCT



MFF



HDCK



### V-Twin Oil Change Kits

Contains everything needed to perform an oil change on most Harley-Davidson\* motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

| STOCK # | UNITS | PKG./SIZE |
|---------|-------|-----------|
| HDCK    | EA    | 1 kit     |
| HDBK    | EA    | 1 kit     |
| HDMC    | EA    | 1 kit     |
| HDMB    | EA    | 1 kit     |

#### FITMENT INFO:

**HDCK, HDBK:** most 1999-2016 Harley-Davidson motorcycles (HDCK includes chrome filter; HDBK includes black filter)

**HDMC, HDMB:** most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter)





- Outboard • Inboard
- Inboard/Outboard (I/O) • Watercraft

## Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Certified to meet NMMA FC-W Catalyst Compatible performance specifications.

### ● 10W-30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| WCTQTC | EA    | (1) 946-ml Bottle   |
| WCTQTC | CA    | (12) 946-ml Bottles |

### ● 10W-40

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| WCFQTC | EA    | (1) 946-ml Bottle   |
| WCFQTC | CA    | (12) 946-ml Bottles |

### ● 25W-40 (Synthetic Blend)

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| WCMQTC | EA    | (1) 946-ml Bottle   |
| WCMQTC | CA    | (12) 946-ml Bottles |



## ● HP Marine™ Synthetic 2-Stroke Oil

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| HPMQTC | EA    | (1) 946-ml Bottle      |
| HPMQTC | CA    | (12) 946-ml Bottles    |
| HPM1GC | EA    | (1) 3.78-litre Bottle  |
| HPM1GC | CA    | (4) 3.78-litre Bottles |



Pete Maina  
Pro Fisherman



### RUNS ON FREEDOM

Don't let powersports manufacturers bully you into buying their brand of oil. You have the freedom to choose your brand of oil and keep your warranty intact. Find out more at [AMSOIL.ca/freedom](http://AMSOIL.ca/freedom).

**OUTSTANDING PROTECTION FOR LOWER UNITS**



## ● Universal Synthetic Marine Gear Lube

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.<sup>†</sup> Choose the easy-pack for fast, easy installation.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AGMTB  | EA    | (1) 296-ml Tube        |
| AGMTB  | CA    | (6) 296-ml Tubes       |
| AGMQTC | EA    | (1) 946-ml Bottle      |
| AGMQTC | CA    | (12) 946-ml Bottles    |
| AGMPK  | EA    | (1) 946-ml Easy-Pack   |
| AGMPK  | CA    | (12) 946-ml Easy-Packs |



## Marine Gear Lube Pump

Specifically designed to ease installation and reduce mess when servicing lower units.

**STOCK #**  
G3456



<sup>†</sup>Based upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.



AIO



## Runs On Freedom™

### Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/8,000 km.\*

\*To get details and register, visit [AMSOIL.ca/rof/warranty](http://AMSOIL.ca/rof/warranty).

## ● Synthetic 2-Stroke Injector Oil

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AIOQTC | EA    | (1) 946-ml Bottle      |
| AIOQTC | CA    | (12) 946-ml Bottles    |
| AIO1GC | EA    | (1) 3.78-litre Bottle  |
| AIO1GC | CA    | (4) 3.78-litre Bottles |



AIT

MAXIMUM  
RELIABILITY

## ● INTERCEPTOR® Synthetic 2-Stroke Oil

Prevents piston skirt scuffing, ring sticking and exhaust power valve sticking in two-stroke snowmobiles.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AITQTC | EA    | (1) 946-ml Bottle      |
| AITQTC | CA    | (12) 946-ml Bottles    |
| AIT1GC | EA    | (1) 3.78-litre Bottle  |
| AIT1GC | CA    | (4) 3.78-litre Bottles |

Meets the performance requirements of Polaris®, Arctic Cat® and Ski-Doo® two-stroke snowmobiles.

## AMSOIL Fights Wear

AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil delivered **outstanding wear protection and cleanliness** in a rental sled throughout 1,617 miles (2,602 km) of abuse.<sup>CC</sup>

AMSOIL kept pistons virtually free of carbon with nearly all coating intact.



AMSOIL fought the formation of carbon deposits, allowing power valves to move freely.



<sup>CC</sup>Based upon use of a new 2019 Polaris® RMK® 850 as a rental sled at Grizzly Lodge December 2018 - February 2019. \*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



TDR



**Hunter Patenaude**  
Team AMSOIL  
Shearing Speed Sports



## ● **DOMINATOR® Synthetic 2-Stroke Racing Oil**

Delivers outstanding wear protection in high-horsepower and modified racing or trail motors, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| TDRQTC | EA    | (1) 946-ml Bottle      |
| TDRQTC | CA    | (12) 946-ml Bottles    |
| TDR1GC | EA    | (1) 3.78-litre Bottle  |
| TDR1GC | CA    | (4) 3.78-litre Bottles |

**MAXIMUM  
PERFORMANCE**

TCC



## ● **Synthetic Chaincase & Gear Oil**

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

| STOCK# | UNITS | PKG./SIZE          |
|--------|-------|--------------------|
| TCCCNC | EA    | (1) 473-ml Bottle  |
| TCCCNC | CA    | (6) 473-ml Bottles |

ATP



## ● **SABER® Professional Synthetic 2-Stroke Oil**

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ATPSFC | EA    | (1) 189-ml Bottle   |
| ATPSFC | CA    | (12) 189-ml Bottles |
| ATPBCC | EA    | (1) 236-ml Bottle   |
| ATPBCC | CA    | (12) 236-ml Bottles |
| ATPQTC | EA    | (1) 946-ml Bottle   |
| ATPQTC | CA    | (12) 946-ml Bottles |

**SABER® Ratio™**  
100:1 ... 10ml ... 1L

## **SABER Professional Fights Carbon**

Equipment using SABER Professional was **96% carbon-free<sup>N</sup>**.



AMSOIL SABER Professional  
300 Hours  
3.8% Screen Blockage

VS.



Leading Oil Brand  
45 Hours  
98% Screen Blockage

<sup>N</sup>Based on spark-arrestor testing.

## Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

**Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more**

### ○ 5W-30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AESQT  | EA    | (1) 946-ml Bottle   |
| AESQT  | CA    | (12) 946-ml Bottles |

### ● 10W-30

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ASEQTC | EA    | (1) 946-ml Bottle   |
| ASEQTC | CA    | (12) 946-ml Bottles |

### ● 10W-40

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ASFQT  | EA    | (1) 946-ml Bottle   |
| ASFQT  | CA    | (12) 946-ml Bottles |

### ● 15W-50

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| SEFQT  | EA    | (1) 946-ml Bottle   |
| SEFQT  | CA    | (12) 946-ml Bottles |

### ● 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AHFQT  | EA    | (1) 946-ml Bottle   |
| AHFQT  | CA    | (12) 946-ml Bottles |



## Signature Series Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions. Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

## Handle More Heat With Confidence

### Standard Severe Service

## AMSOIL Severe Service

RESERVE PROTECTION

Change Interval – Miles



### ● Multi-Vehicle

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ATFQTC | EA    | (1) 946-ml Bottle      |
| ATFQTC | CA    | (12) 946-ml Bottles    |
| ATFPK  | EA    | (1) 946-ml Easy-Pack   |
| ATFPK  | CA    | (12) 946-ml Easy-Packs |
| ATFTPC | EA    | (1) 9.45-litre Bottle  |
| ATFTPC | CA    | (2) 9.45-litre Bottles |



### ● Fuel-Efficient

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ATLQTC | EA    | (1) 946-ml Bottle      |
| ATLQTC | CA    | (12) 946-ml Bottles    |
| ATLPK  | EA    | (1) 946-ml Easy-Pack   |
| ATLPK  | CA    | (12) 946-ml Easy-Packs |
| ATLTPC | EA    | (1) 9.45-litre Bottle  |
| ATLTPC | CA    | (2) 9.45-litre Bottles |



OTF



## OE Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions.

### ● Multi-Vehicle

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| OTFQTC | EA    | (1) 946-ml Bottle      |
| OTFQTC | CA    | (12) 946-ml Bottles    |
| OTFTP  | EA    | (1) 9.45-litre Bottle  |
| OTFTP  | CA    | (2) 9.45-litre Bottles |

OTL



### ● Fuel-Efficient

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| OTLQTC | EA    | (1) 946-ml Bottle      |
| OTLQTC | CA    | (12) 946-ml Bottles    |
| OTLTP  | EA    | (1) 9.45-litre Bottle  |
| OTLTP  | CA    | (2) 9.45-litre Bottles |

CVT



## Synthetic CVT Fluid

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| CVTQTC | EA    | (1) 946-ml Bottle   |
| CVTQTC | CA    | (12) 946-ml Bottles |

DCT



## 100% Synthetic DCT Fluid

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| DCTQT  | EA    | (1) 946-ml Bottle   |
| DCTQT  | CA    | (12) 946-ml Bottles |

MTG



## Synthetic Manual Transmission and Transaxle Gear Lube

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| MTGQTC | EA    | (1) 946-ml Bottle      |
| MTGQTC | CA    | (12) 946-ml Bottles    |
| MTGPK  | EA    | (1) 946-ml Easy-Pack   |
| MTGPK  | CA    | (12) 946-ml Easy-Packs |

MTF



## Synthetic Synchronesh Transmission Fluid

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| MTFQTC | EA    | (1) 946-ml Bottle   |
| MTFQTC | CA    | (12) 946-ml Bottles |

ART



## Super Shift® Racing Transmission Fluid

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ARTQT  | EA    | (1) 946-ml Bottle   |
| ARTQT  | CA    | (12) 946-ml Bottles |

ATD



## Torque-Drive® Synthetic Heavy-Duty Automatic Transmission Fluid

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ATD1GC | EA    | (1) 3.78-litre Bottle  |
| ATD1GC | CA    | (4) 3.78-litre Bottles |

ATH



## Synthetic Tractor/Hydraulic Transmission Oil

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ATHQT  | EA    | (1) 946-ml Bottle   |
| ATHQT  | CA    | (12) 946-ml Bottles |





## SEVERE GEAR® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing.

### ● 75W-90

Top fuel efficiency and cold-temperature performance

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| SVGQTC | EA    | (1) 946-ml Bottle      |
| SVGQTC | CA    | (12) 946-ml Bottles    |
| SVGPK  | EA    | (1) 946-ml Easy-Pack   |
| SVGPK  | CA    | (12) 946-ml Easy-Packs |

### ● 80W-90

Excellent extreme-pressure performance and wear protection

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| AGLQT  | EA    | (1) 946-ml Bottle      |
| AGLQT  | CA    | (12) 946-ml Bottles    |
| AGLPK  | EA    | (1) 946-ml Easy-Pack   |
| AGLPK  | CA    | (12) 946-ml Easy-Packs |

### ● 75W-110

Extra viscosity protection without sacrificing fuel efficiency

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| SVTQT  | EA    | (1) 946-ml Bottle      |
| SVTQT  | CA    | (12) 946-ml Bottles    |
| SVTPK  | EA    | (1) 946-ml Easy-Pack   |
| SVTPK  | CA    | (12) 946-ml Easy-Packs |

### ● 75W-140

Maximum viscosity protection for severe-duty applications

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| SVOQTC | EA    | (1) 946-ml Bottle      |
| SVOQTC | CA    | (12) 946-ml Bottles    |
| SVOVK  | EA    | (1) 946-ml Easy-Pack   |
| SVOVK  | CA    | (12) 946-ml Easy-Packs |



Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.

– Joey  
Calif.

SRT



## SEVERE GEAR® SAE 250 EP Synthetic Racing Gear Lube

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| SRTQT  | EA    | (1) 946-ml Bottle   |
| SRTQT  | CA    | (12) 946-ml Bottles |

FGR



## 75W-90 Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 805,000 kilometers as set by equipment manufacturers for over-the-road trucks and heavy equipment.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| FGRQTC | EA    | (1) 946-ml Bottle   |
| FGRQTC | CA    | (12) 946-ml Bottles |

## Easy Installation

**PRODUCT**  
Hand Pump  
FloTool Flexible Pour Spout

**STOCK#**  
G2039  
G3721



G3721



ADA



## Slip Lock® Differential Additive

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.


**Note:** AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

| STOCK# | UNITS | PKG./SIZE         |
|--------|-------|-------------------|
| ADATBC | EA    | (1) 118-ml Tube   |
| ADATBC | CA    | (12) 118-ml Tubes |



## 99% Efficiency at 20 Microns

Filtering particles >20 microns fights engine wear.<sup>AA</sup>

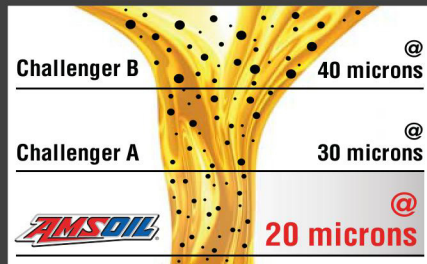

<sup>AA</sup>In accordance with industry-standard ISO SO 4548-12.



## Oil Filters

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear.

- Oil Filters designated with product code EA15K are recommended for 24,000 kilometers/one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- Oil Filters designated with product code EAO are recommended for 40,000 kilometers/one year, whichever comes first, in normal service or 24,000 kilometers/one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.

| STOCK#  | UNITS |
|---------|-------|
| EA15K01 | EA    |
| EA15K02 | EA    |
| EA15K03 | EA    |
| EA15K04 | EA    |
| EA15K05 | EA    |
| EA15K06 | EA    |
| EA15K07 | EA    |
| EA15K08 | EA    |
| EA15K09 | EA    |
| EAO11   | EA    |
| EA15K12 | EA    |
| EA15K13 | EA    |
| EAO15   | EA    |
| EA15K16 | EA    |
| EAO17   | EA    |
| EA15K19 | EA    |
| EA15K20 | EA    |
| EAO23   | EA    |
| EAO24   | EA    |
| EAO26   | EA    |
| EA15K28 | EA    |
| EA15K29 | EA    |

| STOCK#  | UNITS |
|---------|-------|
| EA15K32 | EA    |
| EAO34   | EA    |
| EA15K35 | EA    |
| EA15K37 | EA    |
| EA15K38 | EA    |
| EA15K39 | EA    |
| EAO42   | EA    |
| EA15K43 | EA    |
| EA15K49 | EA    |
| EA15K50 | EA    |
| EA15K51 | EA    |
| EAO52   | EA    |
| EA15K53 | EA    |
| EA15K54 | EA    |
| EAO55   | EA    |
| EAO59   | EA    |
| EAO64   | EA    |
| EAO80   | EA    |
| EA15K88 | EA    |
| EAO98   | EA    |
| EAO99   | EA    |

## More Premium Filters

AMSOIL offers a variety of specialty oil filters constructed with premium synthetic technology. Check the Product Guides at [AMSOIL.ca](http://AMSOIL.ca) or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.



### Heavy-Duty Extended-Life Oil Filters

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

| STOCK#   | UNITS |
|----------|-------|
| EAHD2160 | EA    |
| EAHD3000 | EA    |
| EAHD3191 | EA    |
| EAHD4005 | EA    |
| EAHD9000 | EA    |
| EAHD9025 | EA    |



### Bypass Filtration

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow oil filter.

#### BYPASS OIL FILTRATION SYSTEMS

| STOCK# | UNITS | PKG./SIZE   |
|--------|-------|---|
| BMK21  | EA    | (1) Single-Remote Bypass Kit  |
| BMK22  | EA    | (1) DUAL-GARD Bypass Kit  |
| BMK23  | EA    | (1) Universal Dual-Remote Bypass System                             |
| BMK26  | EA    | (1) Ford 7.3L Dual-Remote Bypass System                             |
| BMK27  | EA    | (1) 2001-2019 GM 6.6L Dual-Remote Bypass System                     |
| BMK28  | EA    | (1) Ford 6.7L Dual-Remote Bypass System                             |
| BMK30  | EA    | (1) Heavy-Duty Bypass Kit   |
| BMK31  | EA    | (1) Ford 6.0/6.4L Single-Remote Bypass System                       |
| BMK32  | EA    | (1) 2001-2016 GM 6.6L Single-Remote Bypass System                   |
| BMK33  | EA    | (1) Ford 6.7L Single-Remote Bypass System                           |
| BMK34  | EA    | (1) 2004-current Cummins 5.0L/5.9L/6.7L Single-Remote Bypass System |

#### BYPASS OIL FILTERS

| STOCK#  | UNITS | PKG./SIZE                       |
|---------|-------|---------------------------------|
| EABP90  | EA    | (1) 6" Filter                   |
| EABP100 | EA    | (1) 7.5" Filter                 |
| EABP110 | EA    | (1) 10.5" Filter                |
| EABP120 | EA    | (1) Heavy-Duty Filter for BMK30 |



### Motorcycle Oil Filters

High-efficiency filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

| STOCK#   | UNITS |
|----------|-------|
| EAOM103  | EA    |
| EAOM103C | EA    |
| EAOM109  | EA    |
| EAOM134  | EA    |
| EAOM134C | EA    |
| EAOM135  | EA    |
| EAOM135C | EA    |
| EAOM138  | EA    |

GRG



## DOMINATOR® Synthetic Racing Grease

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat or low-temperature conditions.

Use in applications that require NLGI No. 2

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| GRGCR  | EA    | (1) 397-g. Cartridge   |
| GRGCR  | CA    | (10) 397-g. Cartridges |

## Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

GPOR1

GPOR2



### ● Synthetic Polymeric Off-Road Grease

Use in applications that require NLGI No. 1, 5% Moly

| STOCK#  | UNITS | PKG./SIZE              |
|---------|-------|------------------------|
| GPOR1CR | EA    | (1) 425-g. Cartridge   |
| GPOR1CR | CA    | (10) 425-g. Cartridges |

### ● Synthetic Polymeric Off-Road Grease

Use in applications that require NLGI No. 2, 5% Moly

| STOCK#  | UNITS | PKG./SIZE              |
|---------|-------|------------------------|
| GPOR2CR | EA    | (1) 425-g. Cartridge   |
| GPOR2CR | CA    | (10) 425-g. Cartridges |

## Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

GPTR1

GPTR2



### ● Synthetic Polymeric Truck, Chassis and Equipment Grease

Use in applications that require NLGI No. 1

| STOCK#  | UNITS | PKG./SIZE              |
|---------|-------|------------------------|
| GPTR1CR | EA    | (1) 397-g. Cartridge   |
| GPTR1CR | CA    | (10) 397-g. Cartridges |

### ● Synthetic Polymeric Truck, Chassis and Equipment Grease

Use in applications that require NLGI No. 2

| STOCK#  | UNITS | PKG./SIZE              |
|---------|-------|------------------------|
| GPTR2CR | EA    | (1) 397-g. Cartridge   |
| GPTR2CR | CA    | (10) 397-g. Cartridges |



GLC



## Synthetic Multi-Purpose Grease

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

*Use in applications that require NLGI No. 2*

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| GLCCR  | EA    | (1) 397-g. Cartridge   |
| GLCCR  | CA    | (10) 397-g. Cartridges |

GWR



## Synthetic Water-Resistant Grease

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

*Use in applications that require NLGI No. 2*

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| GWRCR  | EA    | (1) 397-g. Cartridge   |
| GWRCR  | CA    | (10) 397-g. Cartridges |

GXC



## X-Treme Synthetic Food Grade Grease

Designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved formula (formerly USDA H-1) for incidental contact with food.

*Use in applications that require NLGI No. 2*

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| GXCCR  | EA    | (1) 397-g. Cartridge   |
| GXCCR  | CA    | (10) 397-g. Cartridges |



## Synthetic Air Tool Oil

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| AIRBA  | EA    | (1) 118-ml Bottle   |
| AIRBA  | CA    | (12) 118-ml Bottles |

## Semi-Synthetic Bar and Chain Oil

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ABCQTC | EA    | (1) 946-ml Bottle   |
| ABCQTC | CA    | (12) 946-ml Bottles |



## High-Foam Car Shampoo

Powerful pH-neutral formulation delivers exceptional cleaning action without harming coatings and finishes.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| HFCBNC | EA    | (1) 473-ml Bottle   |
| HFCBNC | CA    | (12) 473-ml Bottles |

## Ceramic Spray

Advanced SiO2 ceramic technology enhances gloss and protects painted and plastic surfaces for up to 12 months with a simple spray-on, wipe-off application.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| CSFCNC | EA    | (1) 473-ml Bottle   |
| CSFCNC | CA    | (12) 473-ml Bottles |



## Interior Detailer

Cleans and restores like-new luster on plastic, trim, dashes and displays without streaks or greasy residue.

### Interior Detailer - Lemon 🍋

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| IDLCNC | EA    | (1) 473-ml Bottle   |
| IDLCNC | CA    | (12) 473-ml Bottles |

### Interior Detailer - Unscented

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| IDNCNC | EA    | (1) 473-ml Bottle   |
| IDNCNC | CA    | (12) 473-ml Bottles |



## Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

### ● ISO 46, SAE 20

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| PCIQTC | EA    | (1) 946-ml Bottle   |
| PCIQTC | CA    | (12) 946-ml Bottles |

### ● ISO 100, SAE 30/40


| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| PCKQTC | EA    | (1) 946-ml Bottle   |
| PCKQTC | CA    | (12) 946-ml Bottles |

UCL



## Preserves Horsepower and Performance

AMSOIL delivers 18 percent more lubricity than Lucas\* and 20 percent more than Sea Foam\* for better retention of horsepower and fuel economy.<sup>1</sup>

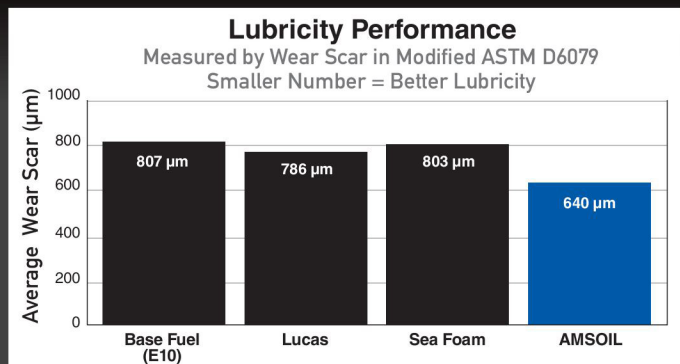

<sup>1</sup>Based on independent testing of AMSOIL Upper Cylinder Lubricant, Lucas Upper Cylinder Lubricant and Sea Foam Motor Treatment obtained on 02/13/2019 using the ASTM D6079 modified for use with gasoline. \*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

## Upper Cylinder Lubricant Gasoline Additive

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| UCLCNC | EA    | (1) 177-ml Bottle   |
| UCLCNC | CA    | (12) 177-ml Bottles |



**INDUSTRY'S MOST  
ADVANCED**  
FORMULATION




**P.i.**<sup>®</sup>

Restores up to 14 percent horsepower.<sup>NN</sup> Bottle compatible with capless fuel systems. Add entire bottle to tank at fill-up.


| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| CPICN  | EA    | (1) 354-ml Bottle   |
| CPICN  | CA    | (12) 354-ml Bottles |

### AMSOIL Restores Horsepower

AMSOIL P.i.<sup>®</sup> restores up to 14% horsepower.<sup>NN</sup>

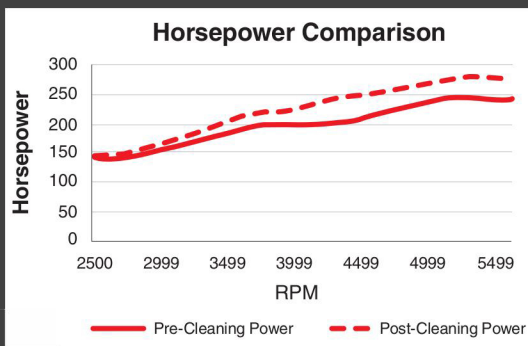

<sup>NN</sup>Based on third-party testing in a 2016 Chevrolet<sup>®</sup> Silverado<sup>®</sup> 1500, 5.3L V-8 GDI with 100,616 miles, using one tank treated with AMSOIL P.i. Actual results may vary. <sup>\*</sup>All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Injector **before** P.i. treatment.



Injector **after one** P.i. treatment.



Cylinder head **before** P.i. treatment.



Cylinder head **after one** P.i. treatment.



**Addresses Ethanol-Related Performance issues**

**DIRECTIONS:** One bottle treats up to 23 litres for cleanup and up to 45 litres for continued protection. For best results use with every tank.

## Quickshot®

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

**Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers • Mowers • Snowblowers • Chainsaws • Generators • Farm & Construction Equipment • and more**

| STOCK# | UNITS | PKG./SIZE          |
|--------|-------|--------------------|
| AQSCNC | EA    | (1) 236-ml Bottle  |
| AQSCNC | CA    | (6) 236-ml Bottles |



**Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.**

**Quickshot helps keep water molecules dispersed to prevent phase separation.**

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot® (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.

## Gasoline Stabilizer

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. 60 ml treats 19 litres of fuel.

| STOCK# | UNITS | PKG./SIZE          |
|--------|-------|--------------------|
| ASTCNC | EA    | (1) 473-ml Bottle  |
| ASTCNC | CA    | (6) 473-ml Bottles |



### AMSOIL Fights Corrosion

AMSOIL provides corrosion protection Sea Foam<sup>®</sup> Motor Treatment can't match, helping maintain power and performance and keeping metal corrosion free, even when subjected to salt water.\*

AMSOIL

Sea Foam



\*Based on independent third-party testing of AMSOIL Gasoline Stabilizer obtained July 1, 2022, and Sea Foam Motor Treatment purchased June 30, 2022, in a modified NACE TM0172 using synthetic sea water per ASTM D665B.

COB

## DOMINATOR<sup>®</sup> Octane Boost

Improves the performance of all two- and four-stroke gasoline-fueled engines. Treats up to 57 litres of gasoline.

| STOCK# | UNITS | PKG./SIZE          |
|--------|-------|--------------------|
| COBBE  | EA    | (1) 354-ml Bottle  |
| COBBE  | CA    | (6) 354-ml Bottles |



MOB

## Motorcycle Octane Boost

Increases octane up to three numbers for maximum power and efficiency in motorcycles. Treats 15-23 litres of gasoline.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| M0BCNC | EA    | (1) 118-ml Bottle   |
| M0BCNC | CA    | (12) 118-ml Bottles |





ADB



ADS



ADF



**UP TO 8%**  
FUEL ECONOMY IMPROVEMENT

### Diesel All-In-One

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. 30 ml treats up to 9.46 L of fuel.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ADBCNC | EA    | (1) 473-ml Bottle   |
| ADBCNC | CA    | (12) 473-ml Bottles |

### Diesel Injector Clean + Cetane Boost

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. 30 ml treats up to 18.93 L of fuel.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ADSCNC | EA    | (1) 473-ml Bottle   |
| ADSCNC | CA    | (12) 473-ml Bottles |

### Diesel Injector Clean

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. 30 ml treats up to 18.93 L of fuel.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| ADFCNC | EA    | (1) 473-ml Bottle   |
| ADFCNC | CA    | (12) 473-ml Bottles |





## Diesel Cetane Boost

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45. 30 ml treats up to 37.85 L of fuel.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| CCBCN  | EA    | (1) 473-ml Bottle   |
| CCBCN  | CA    | (12) 473-ml Bottles |

## Diesel Recovery

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies. 30 ml treats up to 3.79 L of fuel.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| DRCQTC | EA    | (1) 887-ml Bottle   |
| DRCQTC | CA    | (12) 887-ml Bottles |



## ● Passenger Car/Light Truck Antifreeze & Coolant

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 241,000 kilometers or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

| STOCK#   | UNITS | PKG./SIZE              |
|----------|-------|------------------------|
| ANTPC1GC | EA    | (1) 3.78-litre Bottle  |
| ANTPC1GC | CA    | (4) 3.78-litre Bottles |



## ● Heavy-Duty Antifreeze & Coolant

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,609,344 kilometers, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

| STOCK#   | UNITS | PKG./SIZE              |
|----------|-------|------------------------|
| ANTHD1GC | EA    | (1) 3.78-litre Bottle  |
| ANTHD1GC | CA    | (4) 3.78-litre Bottles |



## AMSOIL Resists Corrosion

In third-party, industry-standard testing, cast-iron and copper plates protected by AMSOIL showed virtually **no signs of corrosion**.<sup>HH</sup>



<sup>HH</sup>Based on results of the ASTM D2570 corrosion test.

ANT



## ● Propylene Glycol Antifreeze & Coolant

All-weather protection for up to 241,000 kilometers or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,609,344 kilometers, 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| ANT1GC | EA    | (1) 3.78-litre Bottle  |
| ANT1GC | CA    | (4) 3.78-litre Bottles |

### Antifreeze Test Strips

To test freeze protection and additive concentration, order antifreeze test strips:

| STOCK# | UNITS | PKG./SIZE |
|--------|-------|-----------|
| G1164  | EA    | 70 Strips |



## AMSOIL Resists Cavitation

In third-party, industry-standard testing, cylinder liners protected by AMSOIL showed virtually **no signs of cavitation.**<sup>ii</sup>

<sup>ii</sup>Based on results of the ASTM D7583 cavitation test.

RDCB



## DOMINATOR® Coolant Boost

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

| STOCK# | UNITS | PKG./SIZE          |
|--------|-------|--------------------|
| RDCBCN | EA    | (1) 473-ml Bottle  |
| RDCBCN | CA    | (6) 473-ml Bottles |

PSAF



## ● Powersports Antifreeze & Coolant

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

| STOCK#  | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| PSAFQTC | EA    | (1) 946-ml Bottle   |
| PSAFQTC | CA    | (12) 946-ml Bottles |

CMP



## Metal Protector

Displaces water, penetrates, lubricates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

| STOCK# | UNITS | PKG./SIZE              |
|--------|-------|------------------------|
| CMPSC  | EA    | (1) 208-g. Spray Can   |
| CMPSC  | CA    | (12) 208-g. Spray Cans |

FLSH



## Engine and Transmission Flush

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

| STOCK#  | UNITS | PKG./SIZE           |
|---------|-------|---------------------|
| FLSHCNC | EA    | (1) 473-ml Bottle   |
| FLSHCNC | CA    | (12) 473-ml Bottles |

FLP



## Synthetic Firearm Lubricant and Protectant

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| FLPBAC | EA    | (1) 118-ml Bottle   |
| FLPBAC | CA    | (12) 118-ml Bottles |

"It's a great product to keep your firearms/shotguns in great working order & protect from our harsh weather elements."

– Steve  
Pratts Fork, Ohio

PSF



## Multi-Vehicle Synthetic Power Steering Fluid

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

| STOCK# | UNITS | PKG./SIZE           |
|--------|-------|---------------------|
| PSFCNC | EA    | (1) 473-ml Bottle   |
| PSFCNC | CA    | (12) 473-ml Bottles |



## Fluid Extraction Pump

| STOCK# | P.C. PRICE | FULL PRICE |
|--------|------------|------------|
| G2576  | 21.00      | 22.10      |

Aids in the removal of power steering fluid, motor oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.



Donaldson®  
Filtration Solutions

**MANN  
FILTER**

**WIX**  
FILTERS

## The Company of **FIRSTS**

**More than 45 Years of Innovation and Leadership**

**FIRST** API-qualified 100 percent synthetic motor oil.

**FIRST** to introduce the concept of “extended drain intervals” with a recommended 25,000-mile/12-month drain interval.

**FIRST** synthetic gear lube for automotive use.

**FIRST** synthetic motor oil for diesel engines.

**FIRST** synthetic motor oil for racing engines.

**FIRST** synthetic motor oil for turbocharged engines.

**FIRST** synthetic motor oil for marine engines.

**FIRST** 100:1 pre-mix synthetic 2-cycle oil.

**FIRST** synthetic automatic transmission fluid for automotive use.

